


ASO SIZE: 1/4"-2"

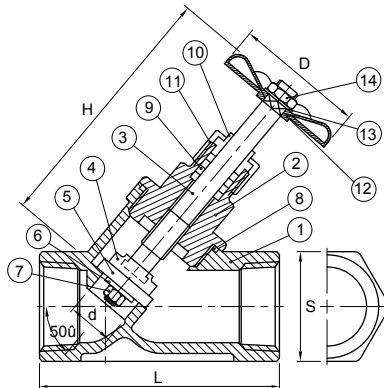

FEATURES:



- *Investment casting body.
- *PN40.
- *Max. working temperature 230°C.
- *The end-to-end length conforms to DIN 3202 Part 4. M8 series. (PN40)
- *Thread ends conform to ANSI B2.1, BS21,

SHUT-OFF VALVE SCREWED END

ITEM	PART	MATERIALS
1	BODY	ASTM-CF8M-A351
2	BONNET	ASTM-CF8M-A351
3	STEM	AISI 316
4	DISC	AISI 316
5	SEAT	PTFE
6	WASHER	AISI 304
7	NUT	AISI 304
8	JOINT GASKET	PTFE
9	STEM PACKING	PTFE
10	GLAND	AISI 304
11	PACKING NUT	AISI 304
12	HANDWHEEL	MALLEABLE IRON
13	WASHER	AISI 304
14	NUT	AISI 304

SIZE	d	L	S	H	D
1/4"	11.6	65.5	27	97	62
3/8"	12.5	65.5	27	97	62
1/2"	12.5	65.5	27	97	62
3/4"	18.0	75.5	32	110	62
1"	23.5	90.5	41	117	83
1-1/4"	31.4	111	50	138	83
1-1/2"	35.7	121	55.5	150	114
2"	45.5	151	70	168	114

APC SIZE: 1/4"-2"

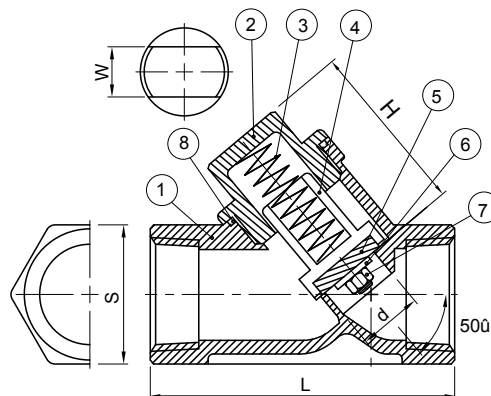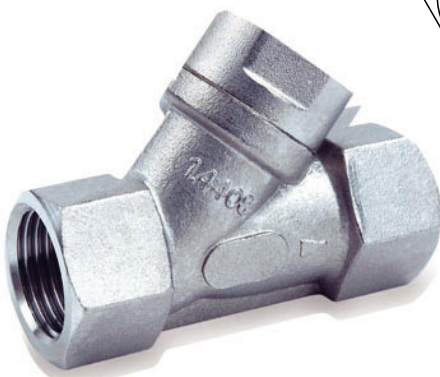

FEATURES:

- *Investment casting body & cap.
- *PN40 rating.
- *Maximum working temperature 230°C.
- *The end-to-end length conforms to DIN 3203. Part 4. M8 series. (PN40)
- *Thread ends conform to ANSI B2.1,

PISTON CHECK VALVE SCREWED END

ITEM	PART	MATERIALS
1	BODY	ASTM-A351-CF8M
2	CAP	ASTM-A351-CF8M
3	SPRING	AISI 316
4	DISC	AISI 316
5	SEAT	PTFE
6	WASHER	AISI 304
7	NUT	AISI 304
8	JOINT GASKET	PTFE

SIZE	d	L	S	H	W
1/4"	11.6	65.5	27	38	24
3/8"	12.5	65.5	27	38	24
1/2"	12.5	65.5	27	36	24
3/4"	18	75.5	32	44	30
1"	23.5	90.5	41	57	35
1-1/4"	31.4	111	50	64	40
1-1/2"	35.7	121	55.5	76	45
2"	45.5	151	70	87	55