


ACK SIZE: 1/4"-2"

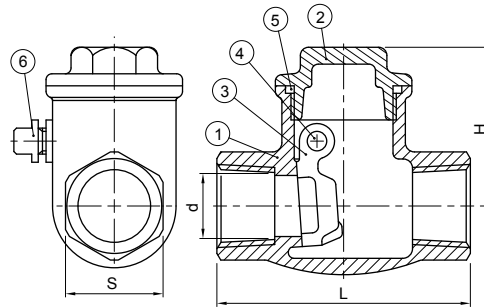

FEATURES:


- *Full port pressure temperature rating
200 PSI /W.O.G. 350°F S.P.
- *threaded ends conform to ANSI B 2.1,
BS 21, DIN 259/2999, ISO228
- *Stainless steel class 200
screwed cap,

CLASS 200 SWING CHECK VALVE

ITEM	PART	MATERIALS
1	BODY	ASTM-A351-CF8M
2	CAP	ASTM-A351-CF8M
3	DISC	AISI 316
4	HINGE PIN	AISI 316
5	PACKING	PTFE
6	PIPE PLUG	AISI 316

SIZE	d	L	S	H
1/4"	10	65	27	45
3/8"	12	65	27	45
1/2"	15	65	27	45
3/4"	20	80	34	55
1"	25	90	40	58
1-1/4"	32	105	50	62
1-1/2"	40	120	57	75
2"	50	140	70	78

AYS SIZE: 1/4"-3"

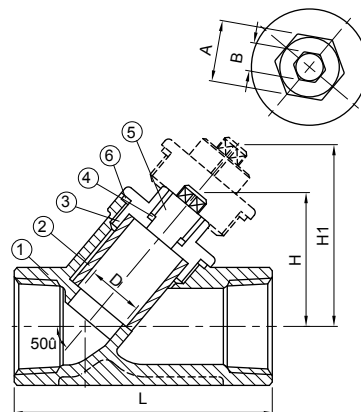

FEATURES:

- *Investment casting body.
- *Max. Pressure 800PSI.
- *Maximum working temperature
230° C.
- *The end-to-end length conforms to
DIN 3202, Part 4, M8 series.
(PN16, PN40)

Y-STRAINER SCREWED END

ITEM	PART	MATERIALS
1	BODY	ASTM A351-CF8M
2	SCREEN	AISI 316
3	GASKET	PTFE
4	BONNET	ASTM A351-CF8M
5	O-RING	VITON
6	BLOW OFF	ASTM A351-CF8M

SIZE	D	L	H	H1	A	B
1/4"	10.0	57	35	45	16	8
3/8"	10.0	57	35	45	16	8
1/2"	15.0	60	38	51	16	8
3/4"	20.0	69	42	55	16	8
1"	25.0	85	50	66	20.7	10
1-1/4"	32.0	99	55	73	25	12
1-1/2"	38.0	111	59	80	25	12
2"	51.0	137	73	100	32	12
2-1/2"	65.0	172	91	153	38	15
3"	80.0	205	110	173	38	15

