

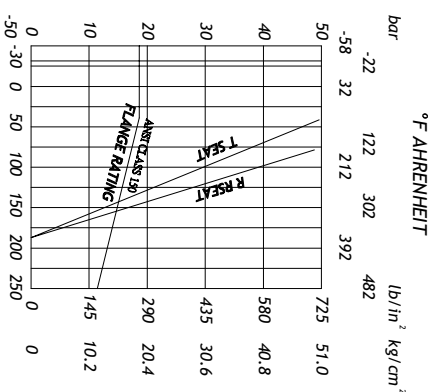





ITEM	PARTS	Q.T	MATERIAL
1	BODY	1	ASTM-A351-CF8M
2	INSERT	1	ASTM-A351-CF8M
3	BALL	1	ASTM-A351-CF8M
4	BALL SEAT	2	PTFE
5	JOINT GASKET	1	PTFE
6	STEM	1	ANSI 316
7	THRUST WASHER	1	ANSI 304
8	STEM PACKING	2-3	PTFE
9	STEM RING	1	ANSI 304
10	HANDLE	1	ANSI 430
11	STEM NUT	2	ANSI 304
12	STOP PIN	1	ANSI 304
13	PLASTIC COVER	1	PLASTIC

DN	ØD	B	Ød	ØF	A	N-I	H	ØK	L	ØM	P	Q	S	T	W
15	96	14	15	45	2	4-1/2"	65	60.5	41	36	51.3	6.5	16.8	M5	123
20	105	16	20	57.4	2	4-1/2"	69	70.0	45	36	53.1	6.5	17.2	M5	123
25	115	16	25	66	2	4-1/2"	80	79.5	54	42	69.6	8.7	25.1	M5	158
32	135	16	32	75.4	2	4-1/2"	87	89.0	58.4	42	75	8.7	23.9	M5	158
40	145	16	38	86	3	4-1/2"	96	98.5	62	50	84.4	10	29.2	M6	198
50	155	18	50	102	3	4-5/8"	104	120.5	72	50	91.8	10	28.8	M6	198

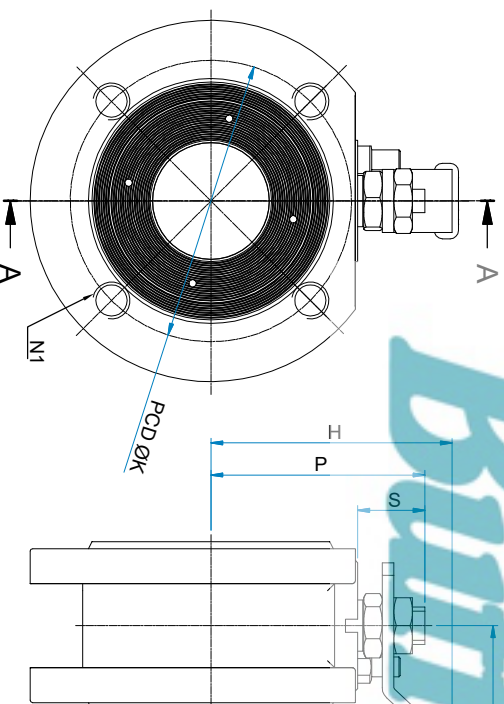

客回餐。

Buffalo Valves

A										ED.	DATE	REVISED CONTENT			Revision No.	Name
Buffalo Valves		TRADE		AGENCY		CUS_NO	ITEM	NO	PART	QTY	EDITION	DATE	DISTRIBUTION			
							V1FW		總圖(CATALOG)			詢價用	2021.01.22			
TOLERANCE(mm)				SURFACE ROUGHNESS												
MACHINING		CASTING		SYMBOL	Rmax	RZ	Ra									
				▽▽▽▽▽	0.8s	0.8z	0.2a	√Rz63								
0.5~6	±0.1	0~10	±0.2	75~100	±0.8			TITLE 台灣_V1FW_CLASS 150_1/2_無鎖片_不銹孔_PTFE_客製								
6~30	±0.2	10~25	±0.25	>100	±1%	▽▽	6.3s	6.3z	1.6a	√Rz16						
30~120	±0.3	25~50	±0.4	ANGLE	±1°	▽	25s	25z	6.3a	√Rz4						
120~400	±0.5	50~75	±0.6			∩	100s	100z	2.5a	√Rz1						